cossiga
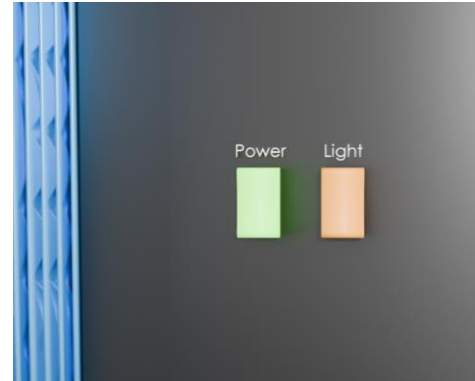
Applicable models:
DTGOR6
DTGOR9
DTGOR12
DTGOR15

CAN BE UNDERTAKEN BY A TRAINED OPERATOR
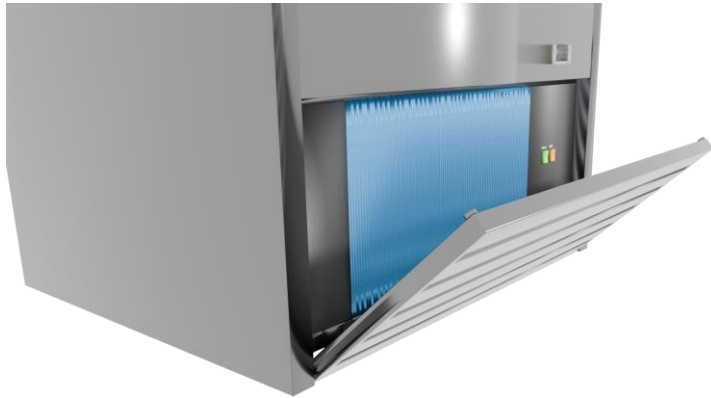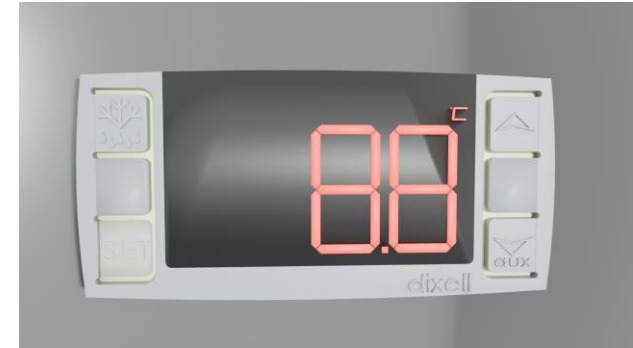
1.
Pull the top of the front grill down to reveal the control switches

Power   Light

2.
Turn the power switch on to start the cabinet and get the shelves cooling down to temperature
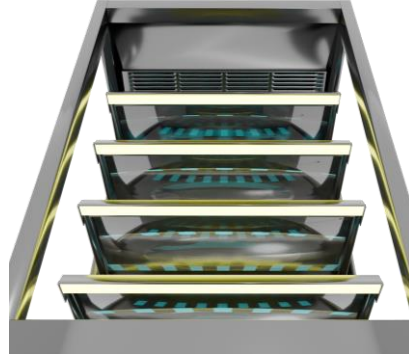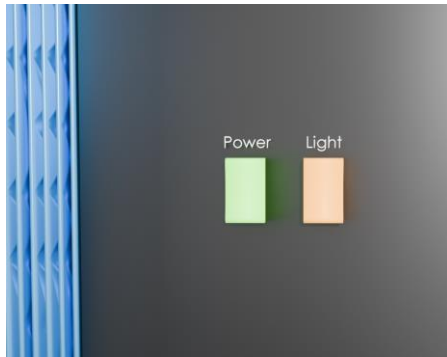
3. Turn the Light switch on to turn the under-shelf lighting on

4. To change to temperature of the cabinet, hold the SET button down on the controller until the °C starts flashing

5. Press the up or down arrows to change the temperature. Press the SET button to lock in your chosen temperature

6. When flashing, this green icon means the cabinet is defrosting

cossiga

7.

When on, this green symbol means the compressor is on

8.

When on, this green symbol means the airflow fans are on