


TTGOR6



## PRODUCT FEATURES

- Open front
- Stainless steel hinged rear door
- Deck forced refrigeration
- Double glazed glass ends
- Three adjustable glass shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- Pull down night blind
- Pigeonhole perspex screens

Maximum shelf load weight 15kg spread evenly  
All units rear venting

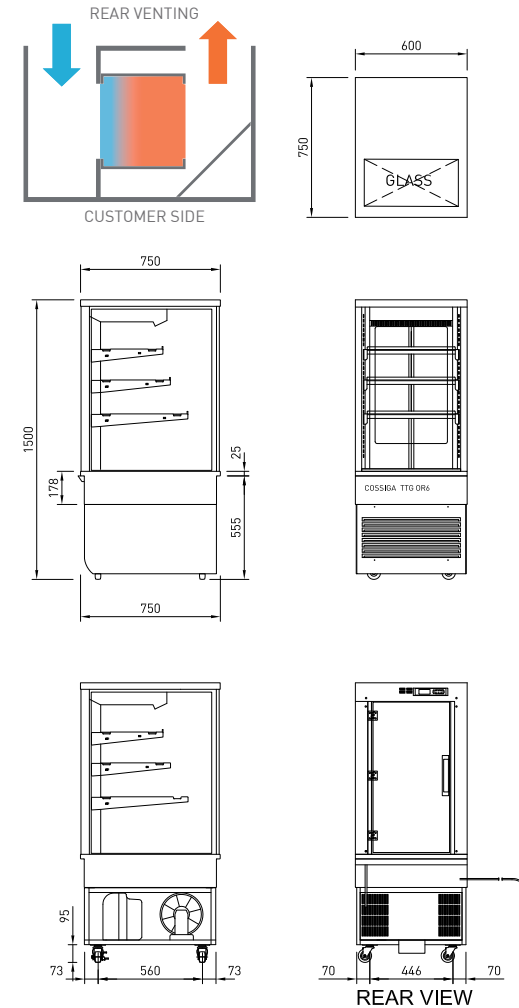

## CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

MODEL	CABINET			WEIGHT KG	SHELVES SIZE 3 X BASE				TOTAL FOOD 100 MM UNITS	DISPLAY M <sup>2</sup>	INTERNAL VOLUME M <sup>3</sup>	FREQUENCY HZ	REFRIGERANT	OPERATING CURRENT		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)		TOP	2ND	3RD	BASE(WXD)						KW 230V	AMP	NZ/AUS 10 AMP	UK 13 AMP		LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT (KG)
TTGOR6	600	750	1500	169	490X295	490X325	490X415	545X515	75	0.78	0.34	50/60 HZ	R290	1.96	6.0	3 PIN PLUG	3 PIN PLUG	220-240V	700	830	1670	197

TTGOR9




UK/EU ONLY

## PRODUCT FEATURES

- Open front
- Stainless steel hinged rear doors
- Deck forced refrigeration
- Double glazed glass ends
- Three adjustable glass shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- Pull down night blind
- Pigeonhole perspex screens

Maximum shelf load weight 15kg spread evenly  
All units rear venting

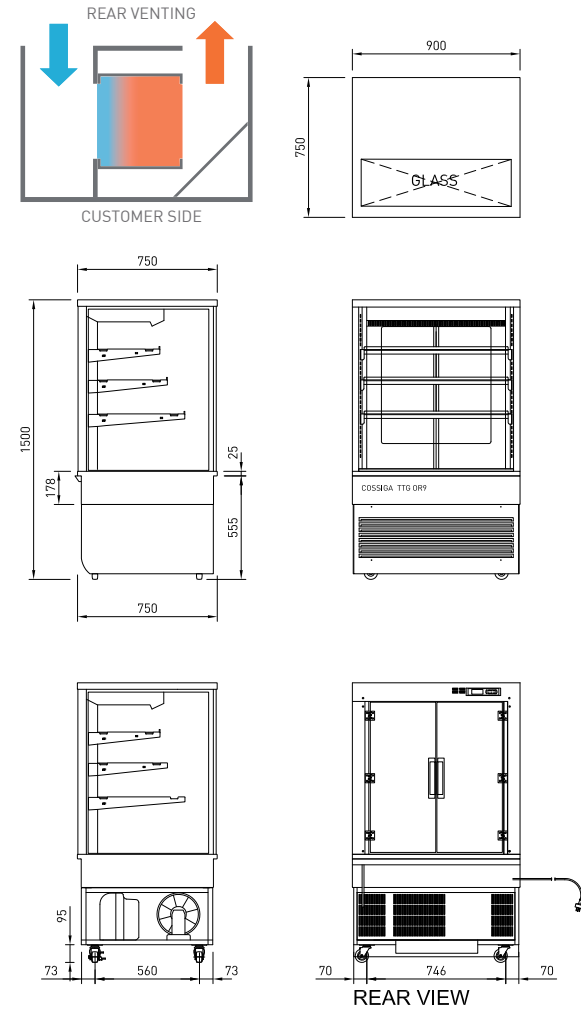

## CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

MODEL	CABINET			WEIGHT KG	SHELVES SIZE 3 X BASE				TOTAL FOOD 100 MM UNITS	DISPLAY M <sup>2</sup>	INTERNAL VOLUME M <sup>3</sup>	FREQUENCY HZ	REFRIGERANT	OPERATING CURRENT		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)		TOP	2ND	3RD	BASE(WXD)						KW 230V	AMP	NZ/AUS 10 AMP	UK 13 AMP		LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT (KG)
TTGOR9	900	750	1500	217	790X295	790X325	790X415	845X515	120	1.25	0.52	50/60 HZ	R290	1.96	6.0	3 PIN PLUG	3 PIN PLUG	220-240V	1000	830	1670	251







## TTGOR12



### PRODUCT FEATURES

- Open front
- Stainless steel hinged rear doors
- Deck forced refrigeration
- Double glazed glass ends
- Three adjustable glass shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- Pull down night blind
- Pigeonhole perspex screens

Maximum shelf load weight 15kg spread evenly  
All units rear venting

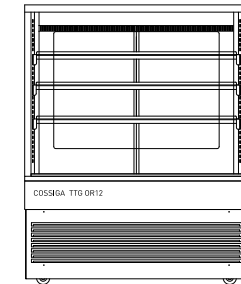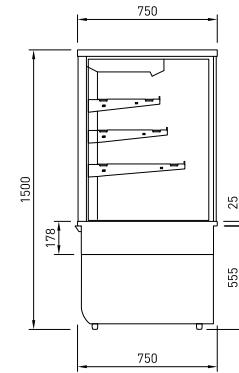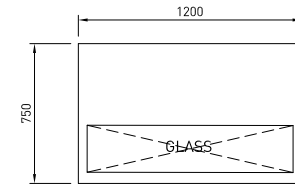

REAR VIEW

### CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

MODEL	CABINET			WEIGHT KG	SHELVES SIZE 3 X BASE				TOTAL FOOD 100 MM UNITS	DISPLAY M <sup>2</sup>	INTERNAL VOLUME M <sup>3</sup>	FREQUENCY HZ	REFRIGERANT	OPERATING CURRENT		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)		TOP	2ND	3RD	BASE(WXD)						KW 230V	AMP	NZ/AUS 10 AMP	UK 13 AMP		LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT (KG)
TTGOR12	1200	750	1500	256	1090X295	1090X325	1090X415	1145X515	155	1.71	0.69	50/60 HZ	R290	1.39	7.6	3 PIN PLUG	3 PIN PLUG	220-240V	1300	830	1670	208


TTGRF9



## PRODUCT FEATURES

- Solid glass front
  - Heated double glazed glass top, sides and front
  - Heated rear sub frame
  - Argon filled sliding rear doors
  - Deck forced refrigeration
  - Four adjustable shelves -flat or angled
  - Ticket strips on shelves and base
  - Under shelf and canopy LED lights
  - Integral condenser
  - 1500 mm high
- Front doors not available for this model

Maximum shelf load weight 15kg spread evenly  
All units rear venting

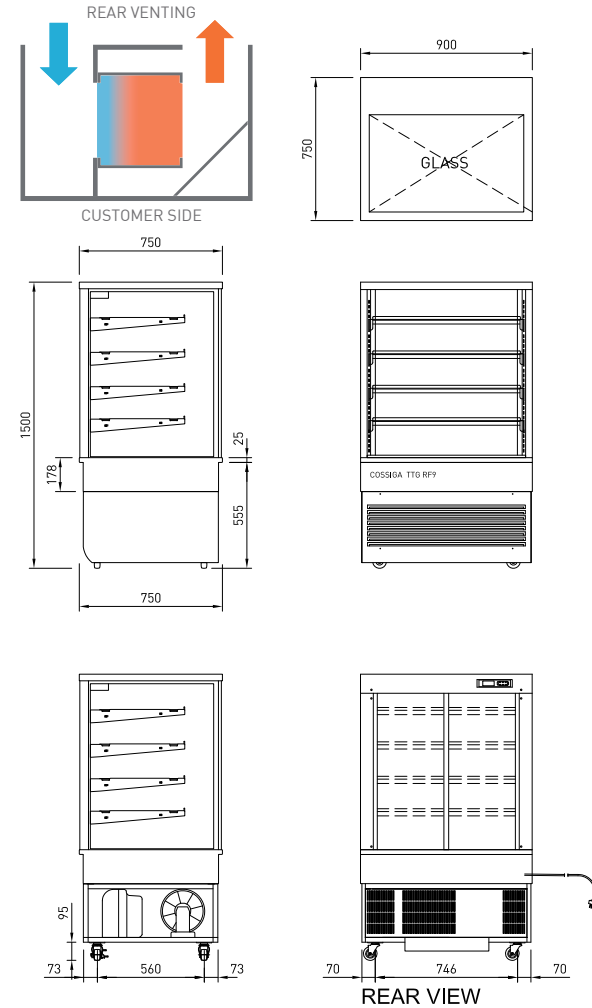

## CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

MODEL	CABINET			SHELVING WEIGHT KG	SHELVING 4 + BASE	OPERATING TEMP DEG C	SHELF W X D	BASE TRAY W X D	TOTAL FOOD 100MM UNITS	DISPLAY M <sup>2</sup>	INTERNAL VOLUME M <sup>3</sup>	FREQUENCY	REFRIGERANT	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]											KWH	AMP	NZ/AUS 10 AMP	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
TTGRF9	900	750	1500	252	4 + BASE	3-8	790 X 445	845 x 515	168	1.84	0.52	50/60 HZ	R290	1.095	6.0	3 PIN PLUG	3 PIN PLUG	220-240V	1000	830	1670	252


TTGRF12



## PRODUCT FEATURES

- Solid glass front
  - Heated double glazed glass top, sides and front
  - Heated rear sub frame
  - Argon filled sliding rear doors
  - Deck forced refrigeration
  - Four adjustable shelves -flat or angled
  - Ticket strips on shelves and base
  - Under shelf and canopy LED lights
  - Integral condenser
  - 1500 mm high
- Front doors not available for this model

Maximum shelf load weight 15kg spread evenly  
All units rear venting

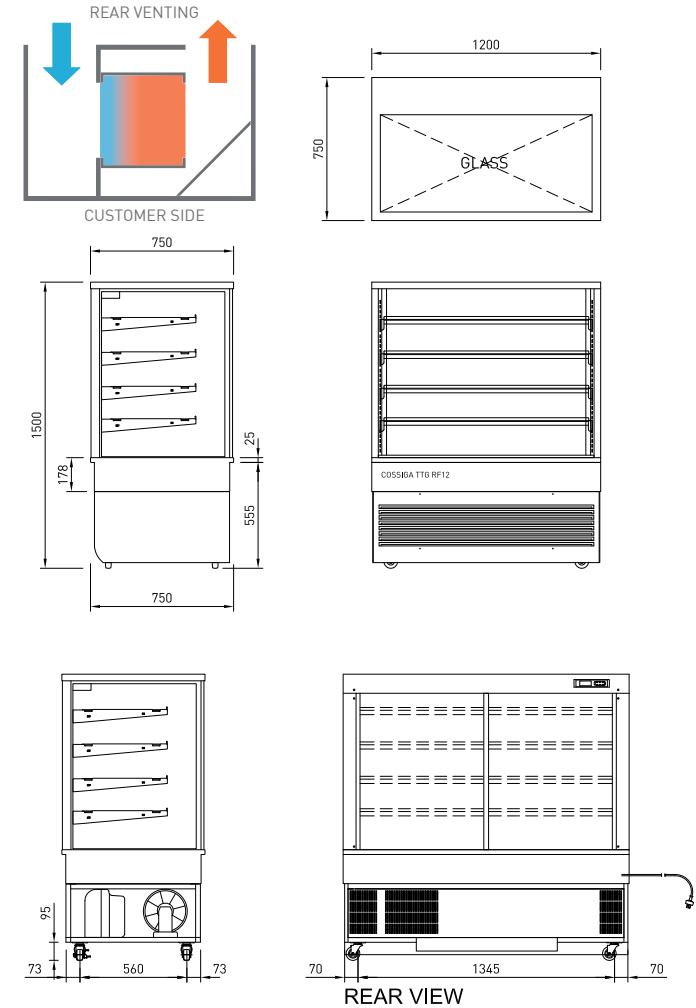

## CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

MODEL	CABINET			SHELVING WEIGHT KG	SHELVING 4 + BASE	OPERATING TEMP DEG C	SHELF W X D	BASE TRAY W X D	TOTAL FOOD 100MM UNITS	DISPLAY M <sup>2</sup>	INTERNAL VOLUME M <sup>3</sup>	FREQUENCY	REFRIGERANT	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]											KWH	AMP	NZ/AUS 10 AMP	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
TTGRF12	1200	750	1500	298	4 + BASE	3-8	1090 X 445	1145 X 515	275	2.52	0.69	50/60 HZ	R290	1.278	7.0	3 PIN PLUG	3 PIN PLUG	220-240V	1300	830	1670	306